

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number  
**WO 2004/052682 A1**

(51) International Patent Classification<sup>7</sup>: **B60Q 1/00**

[KR/KR]; 102-303, Jisan chung gu town, 1270 Jisan-dong, Suseong-gu, 706-090 Daegu (KR).

(21) International Application Number:  
PCT/KR2003/002541

(74) Agent: CHO, Han-Yong; DS PATENT Intellectual Property Group of Dasan, #205 Bubjun Bldg, 81-6, Wonchun-dong,, Paldal-gu, Suwon-si, Gyeonggi-do 442-821 (KR).

(22) International Filing Date:  
25 November 2003 (25.11.2003)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:  
10-2002-0077142  
6 December 2002 (06.12.2002) KR

(71) Applicant (for all designated States except US):  
TECHSIGN CO., LTD. [KR/KR]; #106, Gyeongbuk Technopark, Sanhak hyupdong bldg., 241-1 Dae-dong, Gyeongsan-si, 712-160 Gyeongsangbuk-do (KR).


(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): SA, Jong-Yub

[Continued on next page]

(54) Title: LAMP FOR VEHICLE

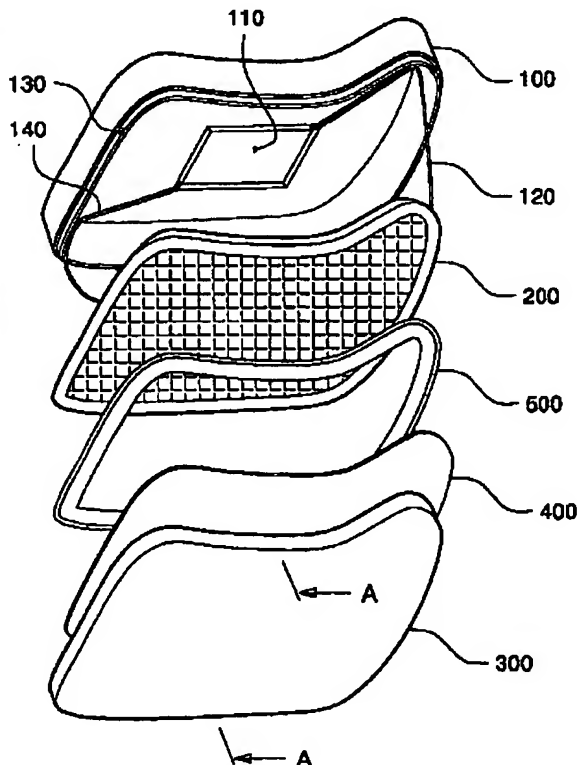

(57) Abstract: The present invention relates to a lamp for a vehicle, wherein light is caused to be incident into a light guide panel from a side surface of the plate-shaped light guide panel, the light is propagated within the light guide panel by means of total reflection and scattered by a scattering pattern formed on a rear surface of the light guide panel so that the light can be radiated to a front surface of the light guide panel, and the light radiated to the front surface is then radiated forward with a predetermined pattern by means of a cover member provided with a lens pattern. A lamp for a vehicle according to the present invention comprises a housing having an opening through which light radiates; a light-transmitting cover member which has a light incidence plane and a light exit plane, and is fixedly installed on the housing to hermetically cover the opening of the housing and provided with a lens pattern formed on the light incidence plane and/or the light exit plane; a plate-shaped light guide panel which has a light incidence plane defined at a side surface thereof to receive light and a light exit plane defined at a front surface thereof to face the cover member and is provided with a scattering pattern for scattering light incident on the light incidence plane thereof toward the light exit plane thereof; a light source installed at a portion adjacent to the light incidence plane of the light guide panel to emit the light to the light incidence plane; and a reflection plate installed on a rear surface of the light guide panel to reflect the light toward a front surface of the light guide panel.